
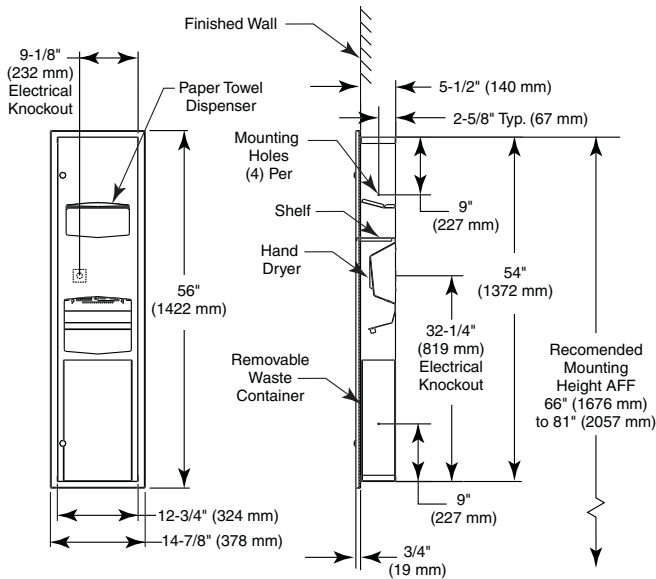


# MULTI-PURPOSE UNIT TOWEL DISPENSER/HAND DRYER/ WASTE RECEPTACLE

- Model 270 – Recessed (recesses 5-1/2", projects 3/4")
- Model 270-10 – Semi-recessed (recesses 3-1/2"; projects 2-3/4")
- Model 270-11 – Surface-Mounted (projects 6-1/4")

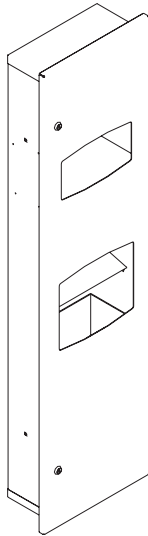

**Document No. 8137**

This information is subject to change without formal notice.  
© 2007 Bradley Corporation  
4-5-2007

## CONSTRUCTION:

- **CABINET** fabricated of type 304 (18-8), 22 gauge stainless steel with exposed surfaces in architectural satin finish. Welded construction with seamless corners and burr-free edges.
- **DOOR** fabricated of type 304 (18-8), 18 gauge stainless steel. Warp resistant, with full length piano hinge and (2) tumbler locks keyed like other Bradley units.
- **TOWEL DISPENSER** fabricated of type 304 (18-8), 22 gauge stainless steel. Rolled edge on dispenser opening.
- **HAND DRYER** - Sensor activation. Universal voltage. European Export available. (To comply with EU Standards, purchase model with option -49).
- **WASTE CONTAINER LINER** fabricated of natural color linear low density polyethylene. — Part # M44-081

## CAPACITY:

Towel Dispenser holds 710 single-fold, 500 multi-fold, or 370 C-fold paper towels;  
Waste Container - 4.37 gal. (16.5 L).

## OPERATION:

Towel dispenser holds single-fold, multi-fold, or C-fold towels without use of special adaptor. Receptacle removable for servicing by unlocking door.

## INSTALLATION:

Recessed unit requires rough wall opening 13"W x 54-1/4"H x 5-1/2"D. Top of wall opening 66" min. to 81" max. above finished floor. Secure to framing with mounting screws (included) at holes provided. Shim at screw points as required. Surface-mounted units need to have holes drilled by installer. Mounting screws are included. Please refer to the installation instructions with the hand dryer for directions.

## OPTIONAL FEATURES

Feature	Suffix
<input type="checkbox"/> For Export (CE Certified)	-49

## GUIDE SPECIFICATION:

Recessed combination towel dispenser, hand dryer, and waste receptacle shall be fabricated of type 304 (18-8), 18 gauge stainless steel with exposed surfaces in satin finish. Door of warp-free construction, equipped with piano hinge and secured by (2) tumbler locks. Towel dispenser capacity - 710 Single-fold, 500 multi-fold, or 370 C-fold towels. 4.37 gal. linear low density polyethylene waste receptacle included.

Overall dimensions: 14-7/8"W x 56"H x 6-1/4"D.



P.O. Box 309, Menomonee Falls, WI 53052-0309  
Phone 1-800-BRADLEY FAX 262-253-4161  
Web Site: <http://www.bradleycorp.com>