




TILT MIRROR/SHELF

- Fixed Tilt
- Welded Corners

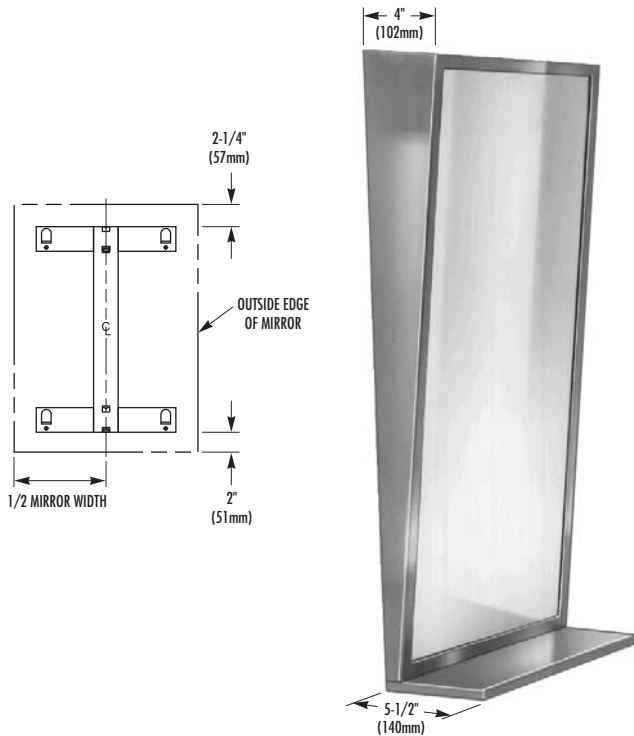

CONSTRUCTION:

- **FRAME** fabricated of type 304 (18-8), 20 gauge stainless steel, corners heliarc welded and ground smooth to satin finish. 20 gauge angle stiffeners welded to frame provide additional rigidity.
- **BACK** fabricated of galvanized steel, secured to frame with concealed screws equipped with integral horizontal hanging brackets.
- **MIRROR** of first quality 1/4" float glass, triple silver plated with electro-copper plated layer and thermosetting infrared cured paint backing with Poly-Glaze protective finish. Meets federal specification DD-M-00411b against silver spoilage and guaranteed for 15 years.
- **WALL HANGER** fabricated of 18 gauge cold rolled steel, all welded construction to form rigid template.
- **SHELF** fabricated of type 304 (18-8), 20 gauge stainless steel with exposed surfaces in architectural satin finish. Welded to frame.
- **SHELF BRACKETS** fabricated of 16 gauge stainless steel are provided on units exceeding 48" width.

INSTALLATION:

Secure concealed mounting bracket to wall with screws (not included) at holes provided. NOTE: Provide in-wall backing at mounting screw locations. Position mirror over mounting bracket to engage hanger tabs. Slide mirror down and lock into position.

OPTIONAL FEATURES:

| Feature | Suffix |
|--|--------|
| <input type="checkbox"/> 1/4" tempered glass mirror in lieu of polished float glass mirror | -2 |
| <input type="checkbox"/> Laminate glass | -3 |
| <input type="checkbox"/> Highly polished No. 8 architectural finish, 20 gauge stainless steel in lieu of polished float glass mirror | -4 |
| <input type="checkbox"/> Bright annealed 20 gauge stainless steel in lieu of polished float glass mirror | -5 |
| <input type="checkbox"/> Plexiglass | -6 |

NOTE: An inherent characteristic of a manufacturing process is distortion which may vary from mirror to mirror.

GUIDE SPECIFICATION:

Fixed tilt mirror shall be framed with type 304 (18-8), 20 gauge stainless steel with 20 gauge concealed stiffeners. Welded corners shall be polished to a uniform satin finish. Mirror shall be of first quality 1/4" float glass guaranteed for 15 years against silver spoilage and protected by a shock absorbing, waterproof foam filler with Poly-Glaze protective finish. Back of unit shall be galvanized steel secured to frame with concealed screws, equipped with integral horizontal hanging brackets and separate wall hanger for concealed mounting. Integral 20 gauge stainless steel shelf shall have front and side flanges with welded and polished corners.

Fixed Tilt Framed Mirror shall be Bradley Model 7405-_____ " W x _____ " H (specify width and height).

Document No. 8730

This information is subject to change without formal notice.
© 2008 Bradley Corporation
7-31-2008

Bradley

P.O. Box 309, Menomonee Falls, WI 53052-0309
Phone 1-800-BRADLEY FAX 262-253-4161
Web Site: <http://www.bradleycorp.com>