
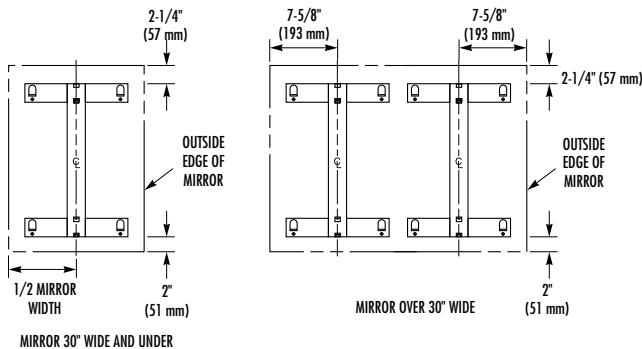


# MIRROR/SHELF

- Roll-Formed Channel Frame
- Theft Resistant Mounting

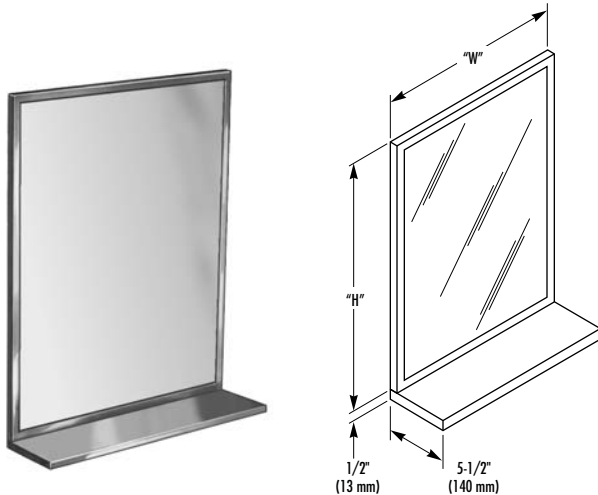

## CONSTRUCTION:

- **FRAME** fabricated of heavy-gauge, one-piece, roll-formed stainless steel with bright annealed finish. Channel is 3/4" x 3/4" x 7/16" with 90° mitered corners. Double-strength continuous integral stiffener on all sides for added strength.
- **BACK** fabricated of galvanized steel.
- **MIRROR** of first quality 1/4" float glass triple silver plated with electro-copper plated layer and thermosetting infrared cured paint backing with Poly-Glaze protective finish. Meets federal specification DD-M-00411b against silver spoilage and guaranteed for 15 years. All edges protected by shock-absorbing, neoprene tubing.
- **SHELF** fabricated of type 304 (18-8), 18-gauge stainless steel with exposed surfaces in architectural satin finish. Welded to frame.
- **SHELF BRACKETS** fabricated of 16 gauge stainless steel are provided on units exceeding 48" width.

## INSTALLATION:

Secure concealed mounting bracket to wall with screws (not included) at holes provided. Mounting kits available through Bradley (ref. #899-026). Refer to technical data sheet #8880. NOTE: Provide in-wall backing at mounting screw locations. Position mirror over mounting bracket to engage hanger tabs. Slide mirror down and lock into position.

## OPTIONAL FEATURES:

Feature	Suffix
<input type="checkbox"/> 1/4" tempered glass mirror in lieu of polished float glass mirror	-2
<input type="checkbox"/> Laminate glass	-3
<input type="checkbox"/> Highly polished No. 8 architectural finish, 20-gauge stainless steel in lieu of polished float glass mirror	-4
<input type="checkbox"/> Bright annealed 20-gauge stainless steel in lieu of polished float glass mirror	-5
<input type="checkbox"/> Plexiglass	-6

**NOTE:** An inherent characteristic of a manufacturing process is distortion which may vary from mirror to mirror.

## GUIDE SPECIFICATION:

Mirror shall be framed with one-piece, roll-formed stainless steel with 3/4" face and neatly mitered corners. Double-strength continuous integral stiffener on all sides. Back of unit shall be galvanized steel. Separate mounting brackets for concealed mounting. Integral 18 gauge stainless steel shelf shall have front and side flanges with welded and polished corners. Mirror shall be of first quality 1/4" polished float glass, guaranteed for 15 years against silver spoilage and protected by shock absorbing, neoprene tubing with Poly-Glaze protective finish.

**Framed Mirror shall be Bradley Model 7815-\_\_\_\_\_ " W x \_\_\_\_\_ " H (specify width and height).**

Document No. 8790

This information is subject to change without formal notice.  
© 2008 Bradley Corporation  
7-31-2008

**Bradley** 

P.O. Box 309, Menomonee Falls, WI 53052-0309  
Phone 1-800-BRADLEY FAX 262-253-4161  
Web Site: <http://www.bradleycorp.com>