


 This unit meets "Barrier Free" requirements when mounted in accordance with local ordinances.

# GRAB BAR

- 1-1/2" O.D.
- Concealed Mounting
- Heavy Duty Stainless Steel

**Bradlex®**

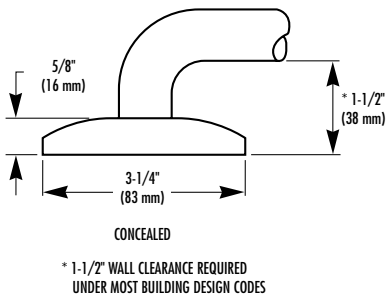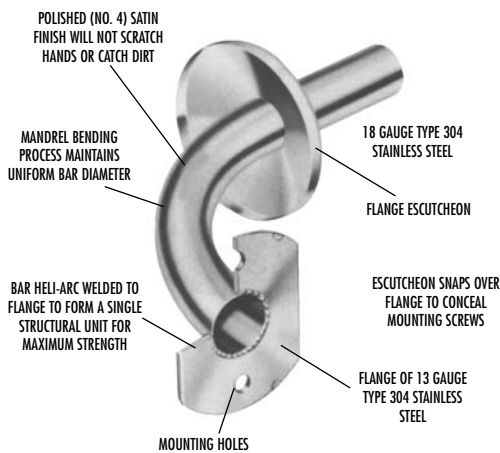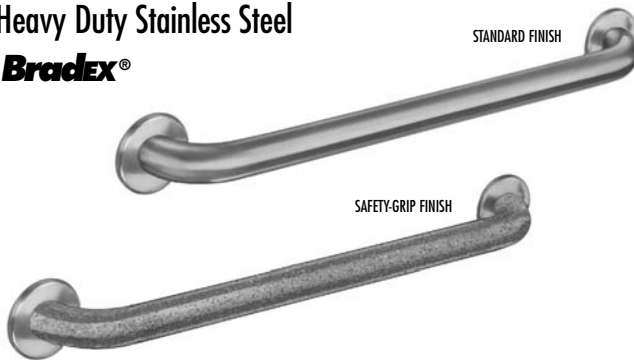

Orders composed of products indicated as **Bradlex®** will be available to ship in one week after receipt of order at the factory. There is no pricing penalty for this service from Bradley.

**Document No. 8810**

This information is subject to change without formal notice.  
© 2007 Bradley Corporation  
4-5-2007

## CONSTRUCTION:

- **FLANGES** fabricated of type 304 (18-8), 3-1/8" dia. 13 gauge stainless steel.
- **ESCUTCHEONS** of type 304 (18-8), 22 gauge stainless steel. One-piece drawn construction with exposed surfaces in architectural satin finish. Snap over flanges to conceal mounting screws.
- **TUBING** of type 304 (18-8), 1-1/2" O.D. 18 gauge stainless steel, seamless construction with exposed surfaces in architectural satin finish. Bent ends of tubing pass thru the flanges and are heliarc welded into a single structural unit for maximum strength. Intermediate supports are contour cut and joined by heliarc welding to form an integral part of the grab bar. All welds ground and polished to blend. Mandrel bending process maintains uniform bar diameter. Return provides 1-1/2" standard safety clearance between wall and bar.

## STRENGTH:

When properly mounted, all Bradley heavy duty grab bar systems meet or exceed the requirements of ANSI Standard A117.1, the ADA and ABA Accessibility Guidelines for Buildings and Facilities (ADAAG) and the Uniform Federal Accessibility Standard (UFAS).

## INSTALLATION:

Secure to wall where adequate in-wall backing exists. Use bar as template to locate mounting holes. Drill holes and set anchors as appropriate. Mount grab bar and secure mounting screws. Snap escutcheons into place. (For Bradley grab bar mounting kits, refer to Mounting Kits page at back of Grab Bar section.)

## OPTIONAL FEATURES

Feature	Suffix
<input type="checkbox"/> Safety-grip finish	-2
<input type="checkbox"/> High-polish finish	-4
<input type="checkbox"/> Safety grip with polished finish	-7

## GUIDE SPECIFICATION:

Grab bar shall be fabricated of type 304 satin finish stainless steel with concealed mounting flanges in sizes and configurations as indicated. Install with Bradley Mounting Kits as indicated.

Grab Bar shall be Bradley Model 812.

<b>Bradlex® Models</b>					
Configuration Number	Shipping Data		Configuration Number	Shipping Data	
	Cu. Ft.	Wt. Lbs.		Cu. Ft.	Wt. Lbs.
001-12"	0.13	2	059**	2.85	7
001-18"★	0.14	2	059-36" x 54"	4.34	7
001-24"★	0.14	3	059-42" x 54"	4.5	7
001-30"	0.15	3			
001-36"★	0.15	3			
001-42"★	0.15	4			
001-48"★	0.25	4			

NOTE: These units must ship via common carrier.  
\*\* 059 36" x 52" Standard Dimensions.  
★ Indicates available Safety Grip. **Bradlex®**

**Bradley** 

P.O. Box 309, Menomonee Falls, WI 53052-0309  
Phone 1-800-BRADLEY FAX 262-253-4161  
Web Site: <http://www.bradleycorp.com>